

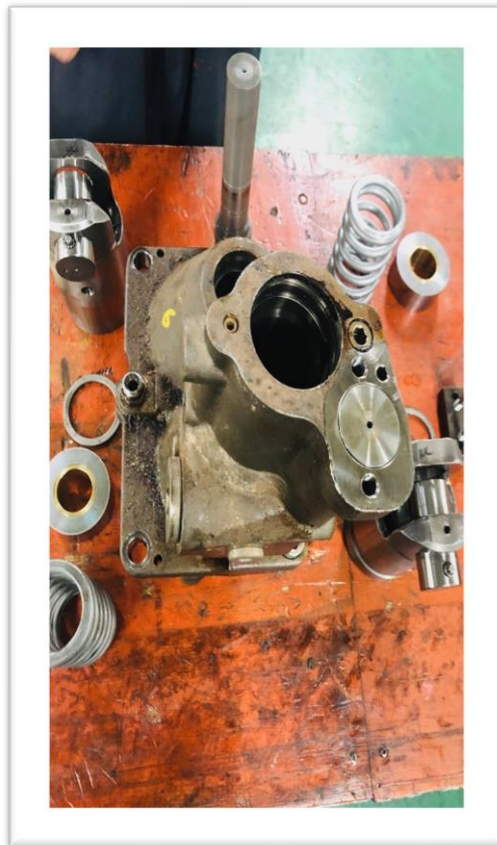
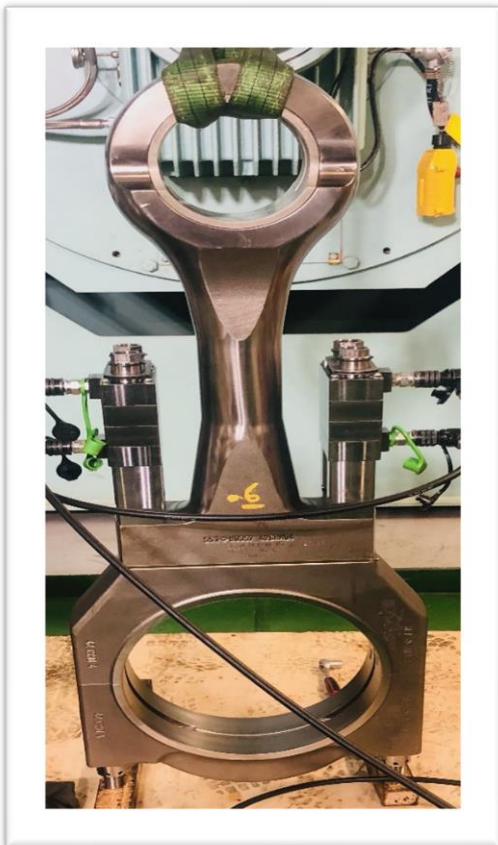


Case Title	Wartsila 8L34DF 24.000RHR Overhaul
Machinery Type	Wartsila 8L34DF
Achievement Date	November 2022

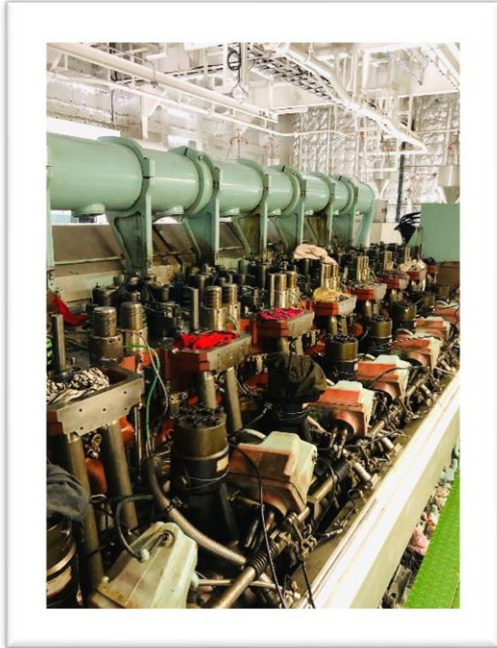

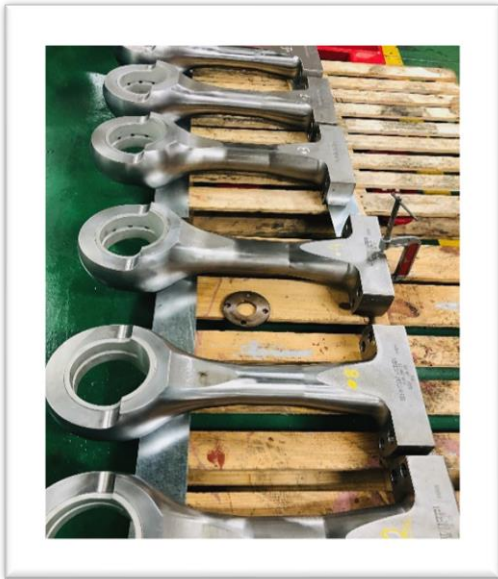

Project Details

As part of our 3-year labor service agreement for a total of 32-Wartsila 34DF MGEs; our engineers boarded an LNG carrier during Dry Dock in Singapore on November, 2022. We carried out the 24.000 RHR overhaul interval which included overhauling and replacement of multiple parts and adjacent components. Among others, the attendance scope included items such as:

- Cylinder Head Renewal
- Small-End Bearing Renewal (on board by our engineers)
- Charge Air Cooler removal-cleaning-installation
- VIC Removal and Overhaul (Early marine engine with VIC present)
- Piston removal and measurements

And more

Measurements were taken before, throughout and post-overhaul and a detailed report was provided for this highly successful attendance.